

## Data sheet

### OpDAT PF patch panel VIK 12xSC-D (metal), MM, gray

Page 1/5


P/N  
1502005212-E  
EAN 4250184108238

2018-27-02

## Illustrations



Dimensional drawing

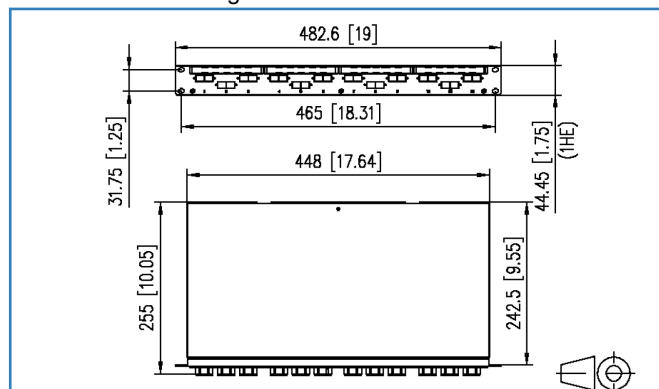

See enlarged drawings at the end of document

## Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- equipped with SC-D adapters
- light construction with aluminum front plate and housing
- unequipped cutouts are closed with blind plugs
- removable front plate for easy adapter mounting
- 10 possible cable entries in the rear panel for 4x PG13.5, 2x PG16/M20 or 2x PG21/M25 cable glands and for two pre-terminated installation cables (VIK)
- snap-on cover for easy access during service work
- label windows for enclosed identification labels
- variants: equipped with 6 or 12 SC-D adapters each blue (OS2), lime green (OM5), violet (OM4), aqua (OM3) or 6 or 12 SC-D APC adapters green (OS2)



## Data sheet

### OpDAT PF patch panel VIK 12xSC-D (metal), MM, gray

Page 2/5

P/N

1502005212-E

EAN 4250184108238

2018-27-02

## Technical Data

### General Data

Fields of application	Office Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	metallike
Dimensions	
Dimension (L x W x H)	255.00 x 482.60 x 44.45 mm
Dimension (W x H)	19.00 x 1.75 in.
Inches	19 inches
Height unit	1RU
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	label window with identification label + printed numbers

### Connections/interfaces

Connector technology interface 1	SC-D Couplers
Connector technology interface 2	SC-D Couplers
Number of ports interface 1	12
Number of ports interface 2	12
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12
Number of ports with dust protection interface 2	12
Cable access/outlet	several possibilities for cable entry on the back

### Mechanical characteristics

Cut-out	SC-D, LC-Q, ST-D
Connector type	Duplex
Life - Number of mating cycles	min. 1000
strain relief	yes



Data sheet

Page 3/5

## OpDAT PF patch panel VIK 12xSC-D (metal), MM, gray

P/N

1502005212-E

EAN 4250184108238

2018-27-02

### Technical Data

#### Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	Al (Aluminium)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	GD-Zn (zinc die-cast)

#### Approvals

RoHS	compliant
------	-----------

#### The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-4
----------------------------------	----------------

#### Classifications

ETIM 6.0	EC001130
----------	----------

#### Packing details

Type of packaging	1 pc(s) / box
Packaging dimension (W x H x D)	540.00 x 380.00 x 60.00 mm
Packaging dimension (W x H x D)	21.26 x 14.961 x 2.362 in.



Data sheet

**OpDAT PF patch panel VIK  
12xSC-D (metal), MM, gray**

Page 4/5

**P/N  
1502005212-E  
EAN 4250184108238**

2018-27-02

## Accessories

P/N	Designation
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels



Data sheet

OpDAT PF patch panel VIK  
12xSC-D (metal), MM, gray

Page 5/5

P/N  
1502005212-E  
EAN 4250184108238

2018-27-02

## Illustrations

Dimensional drawing

