

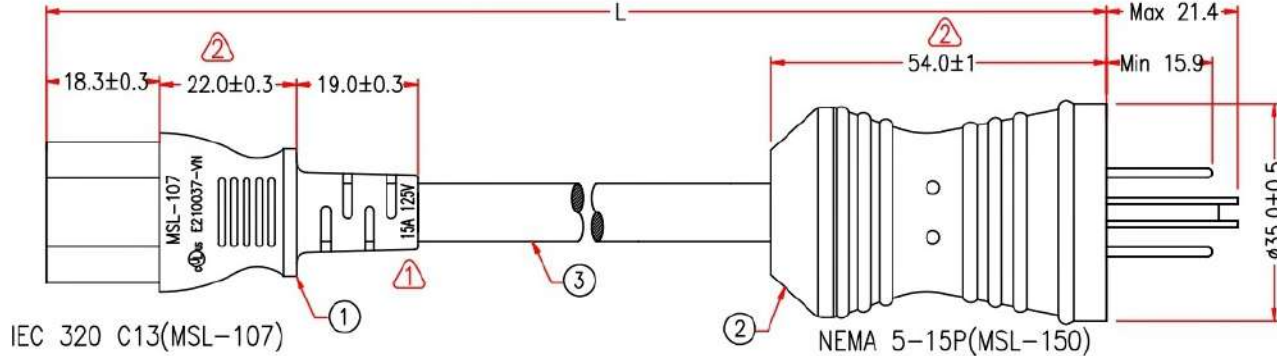



P1:	M-005B
P2:	M-Y087A
	M-087A
P3:	M-087B

Customer No.: No.1



P1,P2: cULus E210037-VN

PACKING:




ITEM NO.	LENGTH(L)	LENGTH(X)
AC-B141513-03	915mm	895mm
AC-B141513-06	1830mm	1810mm
AC-B141513-10	3048mm	3030mm
AC-B141513-15	4572mm	4550mm
AC-B141513-25	7620mm	7600mm

NOTE: All relevant materials are complied with RoHS directive .
THE CABLE MARKING IS CONCAVE LETTERING MOULD

⚠️ CABLE MARKING:

(UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E204978
c(UL) SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V E204978 MSL-VN-

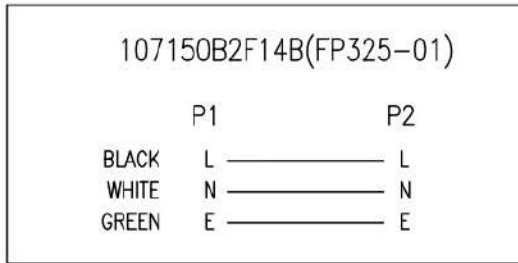

3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSVT011403C-147	H5TC21-0304K09	Xmm	M304
2	MOLDED PVC 80P, COLOR GREEN	H1BP01-0304N07		M304
	MOLDED PVC 45P, COLOR BLACK (外模)	H1BF01-0304K09		M304
	MOLDED PVC 35P, COLOR BLACK (内模)	H1BC02-0304K09		M304
	RIVETING CLAW (脚爪)	A1RT07-1220	1	M1220
1	TERMINAL: 98478BL-1	A1RQ99-0257	1	M257
	TERMINAL: 98693BL-1	A1RT05-0257	2	M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-003	A1QC14-0767	1	M767
	TERMINAL: 2*4mm, 98744BS-0/A	A1QB42-0257	3	M257
No.	DESCRIPTION		Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DESIGNER	XJW		
DRAWING	DAI		
DATE	01/AUG/24		
ITEM NO.	AC-B141513-XX	UNIT:mm	

REV.2 2024.08.01 MODIFY MARKING&DIMENSIONAL TOLERANCE
 REV.1 2022.04.01 MODIFY P2 WORD MODEL & P1 VOLTAGE
 NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm