

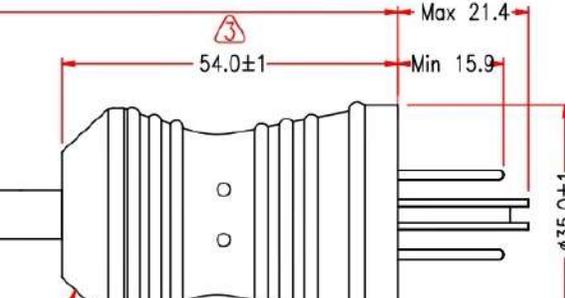
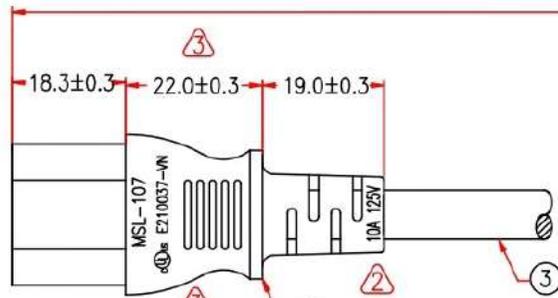


P1: M-005B

P2: M-Y087A
M-087A

P3: M-087B

Customer No.: No.1



IEC 320 C13(MSL-107)


NEMA 5-15P(MSL-150)

P2

P3


P1,P2: cULus E210037-VN

PACKING A: <3M




ITEM NO.	LENGTH(L)	LENGTH(X)
AC-B181513-03	915mm	895mm
AC-B181513-06	1830mm	1810mm
AC-B181513-10	3048mm	3030mm
AC-B181513-15	4572mm	4550mm
AC-B181513-25	7620mm	7600mm

PACKING B: =6FT



PACKING C: >=3M



CABLE MARKING:

⚠ (UL) SJT 3/C 18AWG(0.824MM²) VW-1 105°C 300V E204978

C(UL) SJT 3/C 0.824MM²(18AWG) FT2 105°C 300V E204978 MSL-VN-

107150B2F18B(FP327-01)

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

NOTE: All relevant materials are complied with RoHS directive .
THE CABLE MARKING IS CONCAVE LETTERING MOULD

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 18AWG x 3C, OD 7.8mm, JACKET BLACK, DRAWING No. EPSV1011803C-142	H5TC20-0304K09	Xmm M304
	MOLDED PVC 80P, COLOR GREEN	H1BP01-0304N07	M304
	MOLDED PVC 45P, COLOR BALCK (外模)	H1BF01-0304K09	M304
2	MOLDED PVC 35P, COLOR BALCK (内模)	H1BC02-0304K09	M304
	RIVETING CLAW (脚爪)	A1RT06-1220	1 M1220
	TERMINAL: 98478BL-1	A1RQ99-0257	1 M257
1	TERMINAL: 98693BL-1	A1RT05-0257	2 M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09	M304
	BRACKET: YS-003	A1QC14-0767	1 M767
	TERMINAL: 2*4mm, 98740BS-0/A	A1QB55-0257	3 M257

APPROVED		CompuCable USA	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm		
CHECKED	HU				
DESIGNER	XJW				
DRAWING	DAI				
DATE	21/OCT/24	ITEM NO.	AC-B181513-XX	UNIT:mm	

⚠ REV.3 2024.10.21	MODIFY MARKING PLUG PRINTING
⚠ REV.2 2022.04.01	MODIFY P2 WORD MODEL & P1 VOLTAGE
⚠ REV.1.2021.12.13	MODIFY CABLE LETTERING CONTENT
NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm	