



P1: M-004

P2: M-005

Customer No.: No.: 1




P1

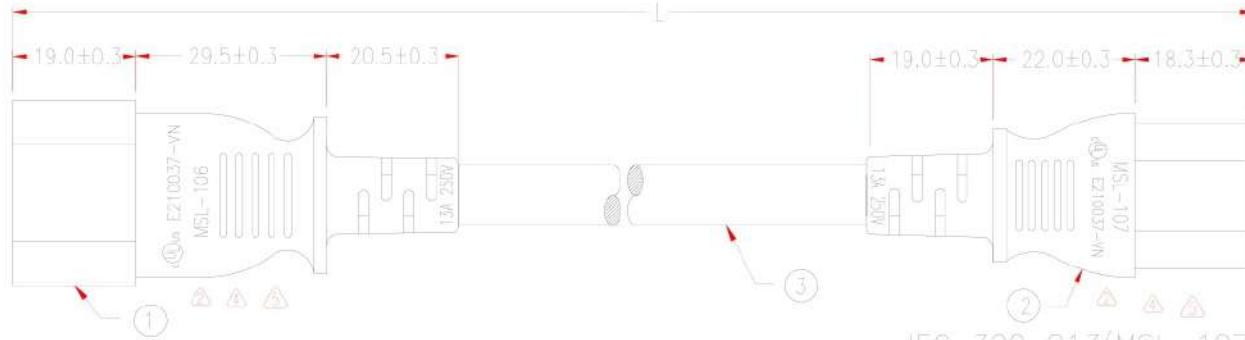

IEC 320 C14(MSL-106)

IEC 320 C13(MSL-107)




P2

PACKING A: ≤1FT

PACKING B: ≤2FT

PACKING C: >2FT



P1,P2: E210037-VN

NOTE: All relevant materials are complied with RoHS directive . THE MARKING IS CONCAVE LETTERING MOULD

MARKING:

(UL) SJT 3/C 16AWG(1.31MM²) VW-1 105°C 300V E204978 C(UL) SJT 3/C 1.31MM²(16AWG) FT2: 105°C 300V E204978 MSL-VN-

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

3	UL SJT 16AWG*3C /OD: 8.5mm, JACKET BLACK, DRAWING No. EPSVT011603C-059	H5TC04-0304K09	L-40mm	M304
2	MOLDED PVC 35P, COLOR BLACK	HIBC02-0304K09		M304
	BRACKET: YS-003	A10C14-0767	1	M767
1	TERMINAL: 2*4mm 98740BS-0/A	A1QB55-0257	3	M257
	MOLDED PVC 35P, COLOR BLACK	HIBC02-0304K09		M304
No.	BRACKET: YS-014	A10C10-0767K09	1	M767
	TERMINAL: 2*4mm 98672BS-1	A1QB07-0257	3	M257
No.	DESCRIPTION		Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm: ±10mm 201~1000mm: ±20mm 1001 ~1500mm: ±25mm 1501~2100mm: ±30mm 2100mm↑: ±40mm		
CHECKED	HU				
DESIGNER	XJW				
DRAWING	WEI				
DATE	19/JUN/23	ITEM NO.	AC-16-022XX	UNIT:mm	

REV.5 2023.06.19	MODIFY P1&P2 LOGO & PACKING & MARKING
REV.4 2017.07.28	MODIFY MOLDED LOGO & PACKING & CABLE
REV.3 2017.06.16	MODIFY MOLDED SIZE
REV.1 2011.11.14	MODIFY CABLE MARKING
REV.2 2015.04.07	MODIFY PLUG LOGO

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm