



P1: M-084A  
P2,P3: M-005  
P4: M-008


Customer No.:  
No.:V1

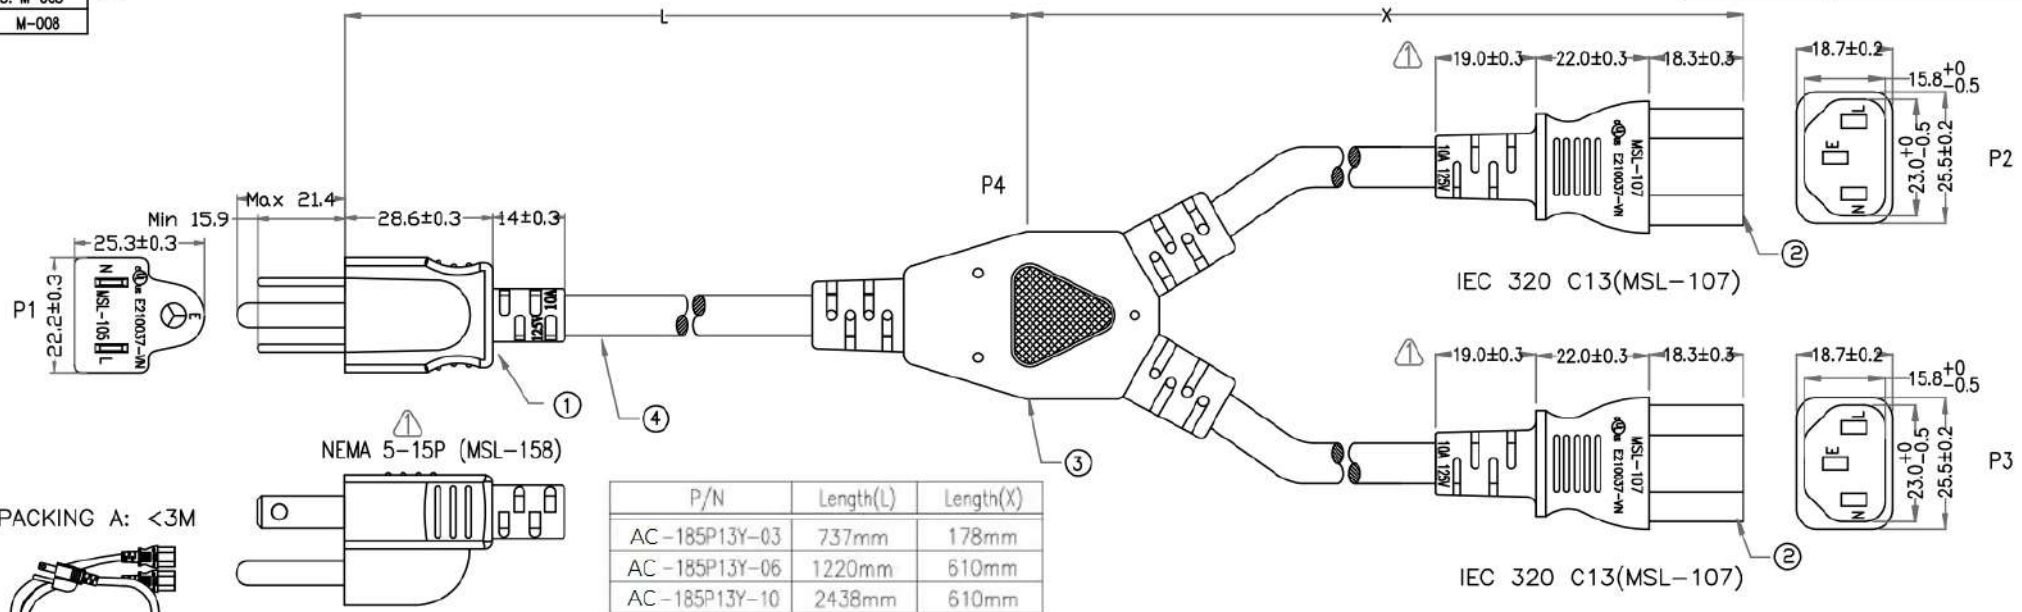

PACKING A: <3M



PACKING B: >3M



P/N	Length(L)	Length(X)
AC-185P13Y-03	737mm	178mm
AC-185P13Y-06	1220mm	610mm
AC-185P13Y-10	2438mm	610mm

P1,P2,P3: E210037-VN  
P4: E210037-VN


\*NOTE: All relevant materials are complied with RoHS directive .  
THE MARKING IS CONCAVE LETTERING MOULD

MARKING:

(UL)SJT 3/C 18AWG(0.824MM<sup>2</sup>)VW-1 75°C 300V E204978  
C(UL) SJT 3/C 0.824MM<sup>2</sup>(18AWG) FT2 60°C 300V E204978 MSL-VN-

111158B2F18A(FP404-00)

	P1	P2	P3
BLACK	L	L	L
WHITE	N	N	N
GREEN	E	E	E

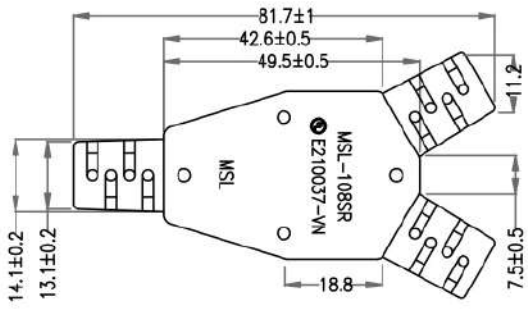

No.	DESCRIPTION	Q'TY	Supplier
4	UL SJT 18AWG x 3C, OD 7.8mm, JACKET BLACK, DRAWING No.EPSJT011803C-159	H5TC42-0304K09	L-10mm*1PCS X-10mm*2PCS M304
3	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09	M304
	BRACKET: YS-021	A1QC18-0767	1 M767
	TERMINAL: 96146BS-0	A1QB17-0257	3 M257
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09	M304
	BRACKET: YS-003	A1QC14-0767	2 M767
	TERMINAL: 2*4mm, 98740BS-0/A	A1QB55-0257	6 M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09	M304
	TERMINAL WITH BRACKET: LP-31M 内架-9	A1QC82-1035K09	1 M1035

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm
CHECKED	HU		
DESIGNER	XJW		
DRAWING	MuMu		
DATE	12/JUL/24		
ITEM NO.	AC-185P13Y-XX		UNIT: mm