





Cable entry plate type KDP 24-Multi

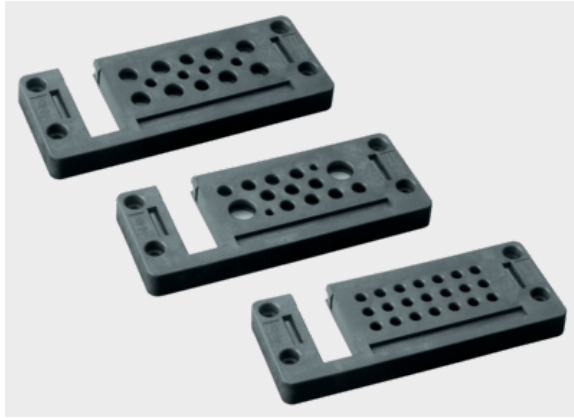

Product information


- This snap-in cable entry plate is a combination of the KDP/N system and the KDL/E
- Frame is partially open at the top and can be fitted with 2 KDT/ZE grommets
- Very good strain relief
- Ideal if, in addition to cables without connectors, a few cables with connectors have to be fed into the control cabinet
- Up to eight pre-assembled cables can be placed in two grommets
- Approval: CSA
- Protection class: IP 54
- Thermal stability: -30 °C to +70 °C
- Material: Housing Polyamide / Seal: TPU/NBR/EPDM
- RoHS compliant
- UV resistant
- Made in Germany
- Suitable for standard cut-outs for 24-pin industrial connectors
- Assembly possible with catch hooks (sheet thickness 1.5 mm - 2.0 mm) or with M5 screws
- Catch hook for plate thickness 1.5 mm - 2.0 mm included with delivery, catch hooks for up to 4.1 mm plate thickness available

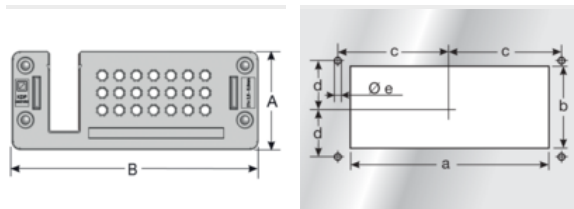

Information, conformities and approvals



Article	Order No.	Color	No. of openings	Openings Quantity / Ø mm	No. Grommets	Cut-out	PU pcs.
KDP 24/10/02	87301076	Black	10	4x 3 mm - 6.5 mm 2x 4.5 mm - 8.5 mm 4x 8 mm - 12.5 mm	2	24-pole	1
KDP 24/14/02	87301078	Black	14	4x 2.5 mm - 5 mm 2x 3 mm - 6.5 mm 8x 4.5 mm - 8.5 mm	2	24-pole	1
KDP 24/15/02	87301080	Black	15	2x 1.5 mm - 3.5 mm 11x 3 mm - 6.5 mm 2x 8.5 mm - 12.5 mm	2	24-pole	1
KDP 24/17/02	87301082	Black	17	17x 3 mm - 6.5 mm	2	24-pole	1
KDP 24/20/02	87301084	Black	20	4x 1.5 mm - 3.5 mm 6x 3 mm - 5 mm 10x 3 mm - 6.5 mm	2	24-pole	1
KDP 24/21/02	87301086	Black	21	21x 2.5 mm - 5 mm	2	24-pole	1

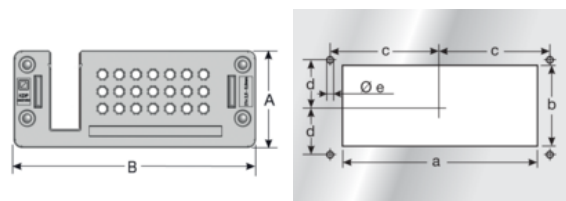



Cable entry plate type KDP 24-Multi

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP 24/14/02	87301078	15.5	58	146	112	36	65	16	5.5
KDP 24/15/02	87301080	15.5	58	146	112	36	65	16	5.5
KDP 24/17/02	87301082	15.5	58	146	112	36	65	16	5.5
KDP 24/20/02	87301084	15.5	58	146	112	36	65	16	5.5
KDP 24/21/02	87301086	15.5	58	146	112	36	65	16	5.5

Material properties



Housing: Polyamide
Seal: TPU / NBR / EPDM Polyamide
TPU / NBR / EPDM

Thermal properties



Temperature / temperature range -30 °C - 70 °C

Protection class



Protection class IP54

Fire properties



Fire classification V0
HB Frame:
Block:

Technical information



LABS free



According to ISO 4892-2

Conformity



RoHS (EC Directive 2011/65/EU)



Cable entry plate type KDP 24-Multi

Approvals and operating permits



CSA approval



GL approval

Classification



ETIM 9: EC002624
ECLASS 14: 27182815
UNSPSC 26.0801: 39121312

General information



Made in Germany