



RevNo	Revision Notes	Date	Checked
1	Initial Release	041125	PC

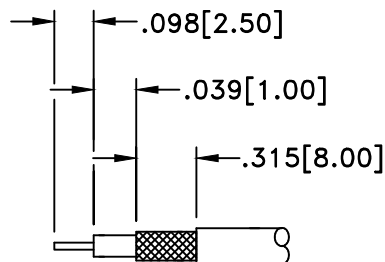

STRIP LENGTH
LMR200

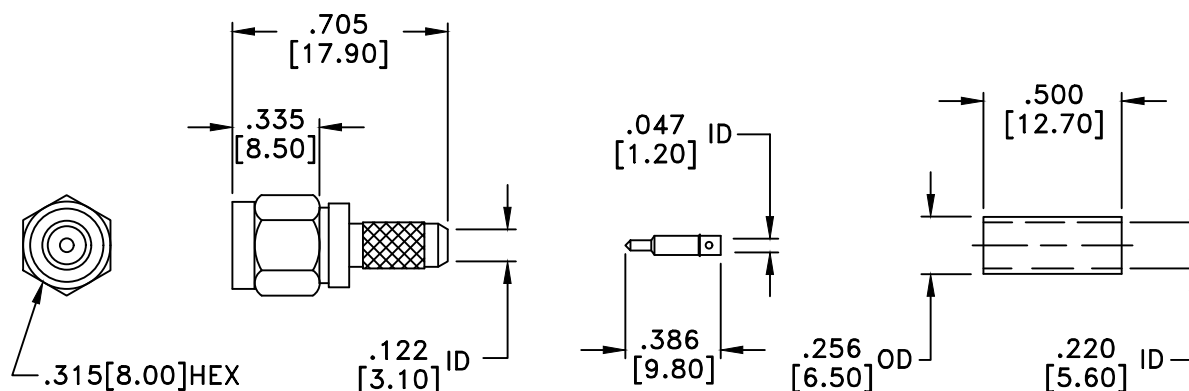

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	BRASS
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
FERRULE	BRASS
FERRULE PLATING	NICKEL

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE RD., #23
CHANDLER, AZ 85226

SMA MALE CRIMP CABLE END
w/SEPARATE CONTACT
for LMR200

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWA-6001-L200	TITLE MWA-6001-L200
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 1 DATE 041125 Scale NONE Sheet 1 of 1