



RevNo	Revision Notes	Date	Checked
1	Initial Release	022113	GC

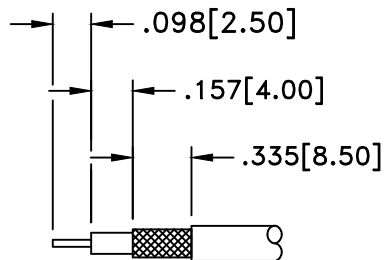


STRIP LENGTHS
RG316, RG174, RG188



RECOMMENDED MOUNTING HOLE

RoHS Compliant

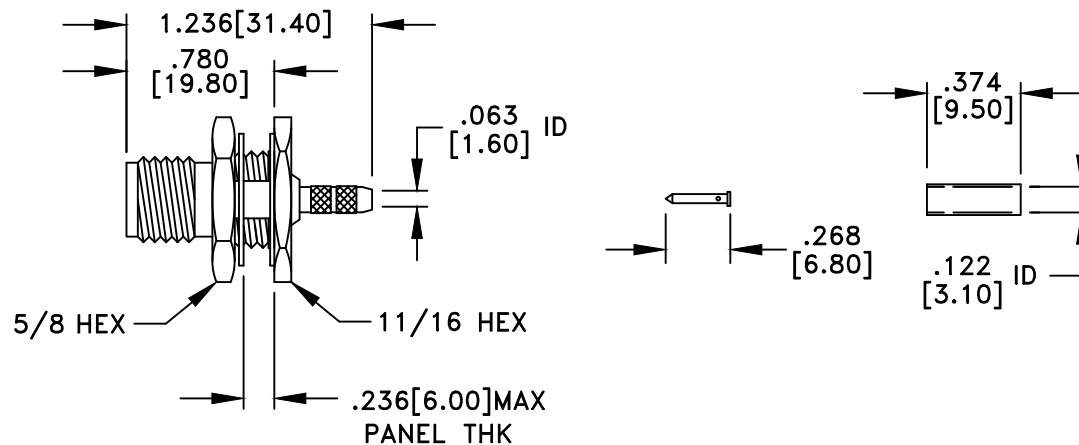

MATERIALS

BODY	BRASS
BODY PLATING	NICKEL
CONTACT	PHOSPHOR BRONZE
CONTACT PLATING	GOLD
DIELECTRIC	TEFLON (PTFE)
O-RING GASKET	SILICONE RUBBER
INTERNAL O-RING	SILICONE RUBBER

50 Ohm IMPEDANCE
500V PEAK VOLTAGE RATING
TEMPERATURE RANGE: -55°C TO +155°C
INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

MILLIMETER WAVE TECHNOLOGIES
6501 W. FRYE ROAD, #23
CHANDLER, AZ 85226

TNC FEMALE BULKHEAD
CRIMP CABLE END
for RG316, IP67

Designed by P. CHEN	Checked by G. COLEMERE	Approved by A. LEE	File name MW-780-E-IP-316	TITLE MW-780-E-IP-316
<p>TOLERANCES DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005</p>				<p>ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.</p>
			REV. 1	Scale NONE
			DATE 022113	Sheet 1 of 1