


RevNo	Revision Notes	Date	Checked
1	RoHS Compliant	091806	PC
2	Plating thickness added	102414	PC
3	Plating thickness corrected	110514	PC
4	Tape and reel required	012915	GC

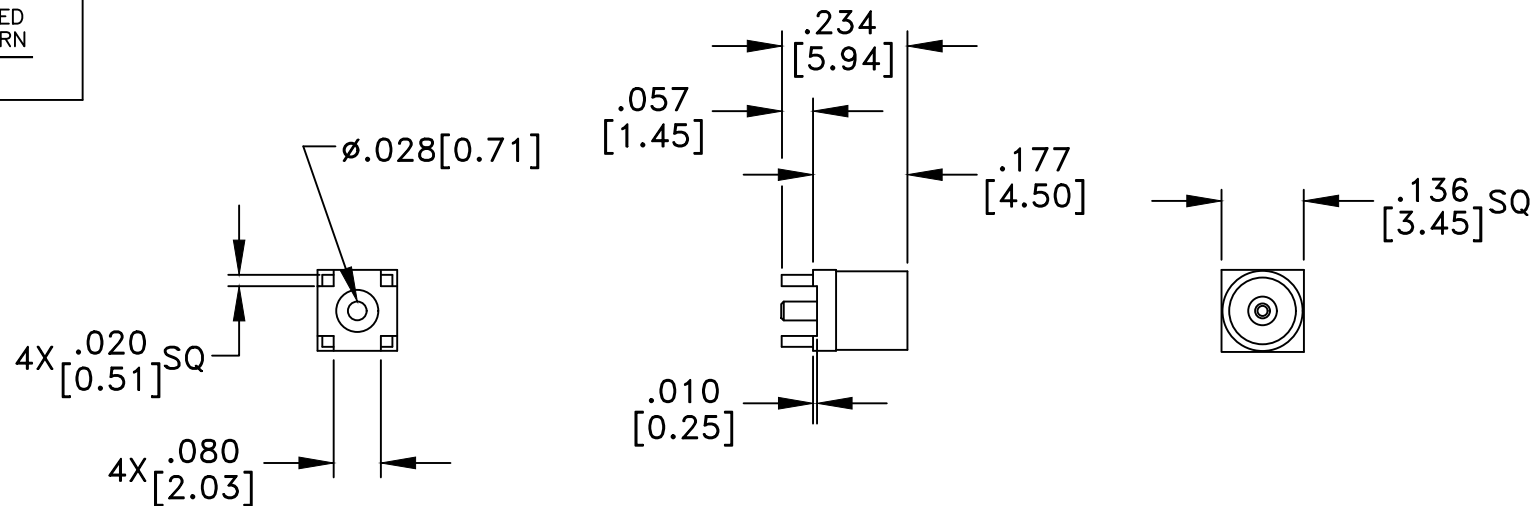

RoHS Compliant

MATERIALS

BODY	BRASS
BODY PLATING	GOLD 10u"
CONTACT	BERYLLIUM COPPER
CONTACT PLATING	GOLD 30u"
DIELECTRIC	TEFLON (PTFE)

50 Ohm IMPEDANCE
 500V PEAK VOLTAGE RATING
 TEMPERATURE RANGE: -55°C TO +155°C
 INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012
 OPERATING FREQUENCY: DC to 6 GHz
 MATING CYCLES: 500 MINIMUM

Note: Tape & Reel packaging

MILLIMETER WAVE TECHNOLOGIES
 6501 W. FRYE ROAD, #23
 CHANDLER, AZ 85226

MMCX FEMALE VERTICAL
 PCB MOUNT

Designed by N. JAIN	Checked by W. CANON	Approved by A. LEE	File name MWXX-7700G-057	TITLE MWXX-7700G-057
TOLERANCES <small>DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED</small> DECIMALS ANGULAR .XX ± .02 ± .06 .XXX ± .005		ALL DIMENSIONS ON THIS DRAWING ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE.		REV. 4 DATE 090205 Scale NONE Sheet 1 of 1