


# SPECIFICATION FOR APPROVAL

**CUSTOMER** \_\_\_\_\_  
**CUSTOMER'S P/N** \_\_\_\_\_  
**ARLITECH P/N**                      **AMPI0640ED2R2MT**  
**DRAWN NO.** \_\_\_\_\_

**PAGE** \_\_\_\_\_  
**REVISION** \_\_\_\_\_  
**DATE** \_\_\_\_\_

## SHAPE & DIMENSION (UNIT:mm)

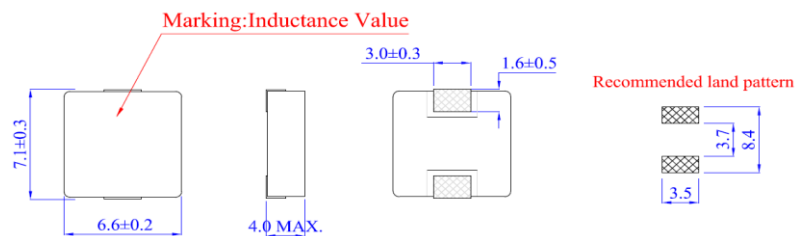

Marking Code: **2R2**

## ELECTRICAL SPECIFICATION

MEAS. ITEM	SPEC.	TEST FREQ.	CONDITIONS(Ta=20~25°C)
<b>L</b>	2.2 μH ± 20%	100KHz/1V	Idc=0A
<b>DCR</b>	10 mΩ Max.		Ta=25°C
<b>Isat</b>	11.0 A Typ.	100KHz/1V	ΔL/L ≒ 30%
<b>Irms</b>	9.0 A Typ.	100KHz/1V	ΔT ≒ 40°C

※This product applies to Consumer Electronics only.  
 If needs to be used in high risk applications, please contact with our sales department .

## GENERAL SPECIFICATION

Electrical specifications : at 20~25°C

Operation Temperature : -40~+125°C (Including self-temperature rise)

※The part temperature (ambient + temp rise) should not exceed 125°C under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature.  
 Part temperature should be verified in the end application.

Storage Condition : +25°C±10°C, Humidity 40~70% RH

## NOTE :

- ※Test Instrument : WAYNE KERR 3260B&3265B LCR Meter
- ※Isat : For Inductance drop approximately 30% from its value without current.
- ※Irms : Typical Heat Rating D.C current would cause an approximately ΔT of 40°C(Ta=25°C)